


MXQ

User Manual

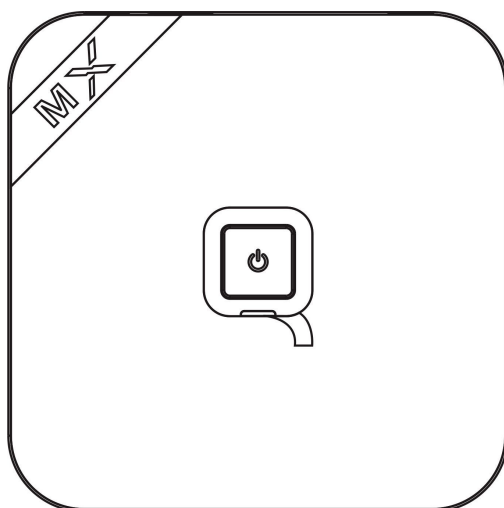


Sorry to the changes of our products parameters but without notice.


1.About MXQ



1.1 Overview

(Top View)

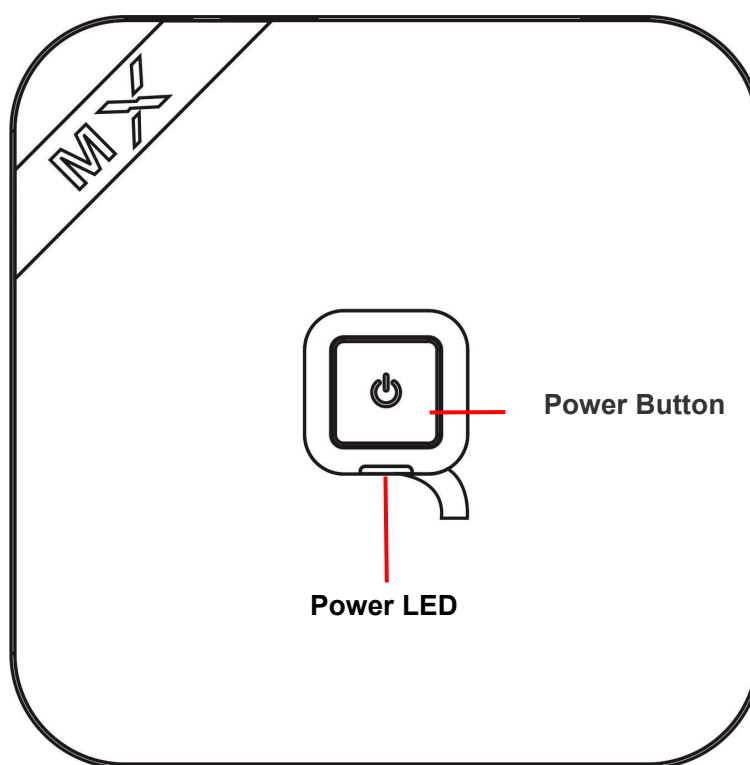

(Front View)

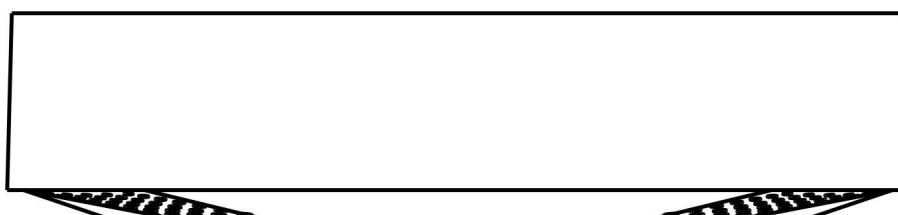

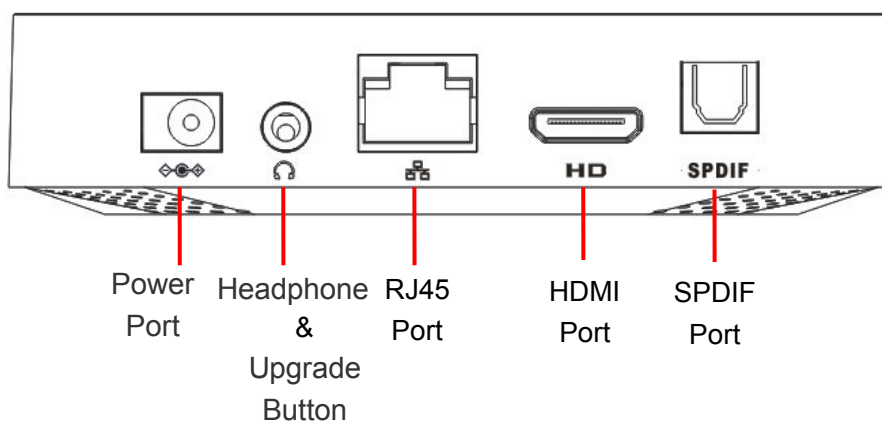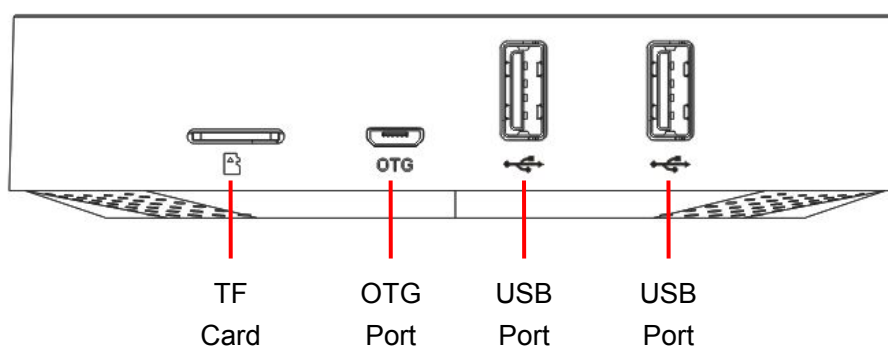(Back View)**(Right View)**

1.2 Accessories

MXQ includes the following accessories



Power Adapter



HDMI Cable



USB Cable



AV Cable

Remote Control


* Accessories and appearance are subject to change without prior notice

2. Getting Started


2.1 Basic Operations

2.1.1 Power On/ Off and Sleep

1. Connect the MXQ to the TV with HDMI cable, connect MXQ to the power adaptor, Connect mouse, air mouse or other input devices with USB port

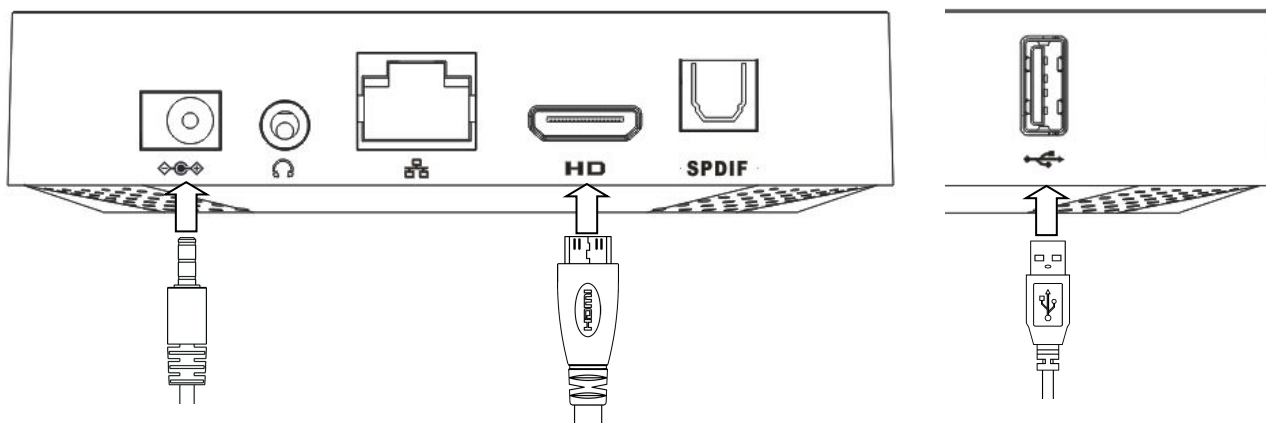

2. Press power button to start MXQ, power LED turns into blue

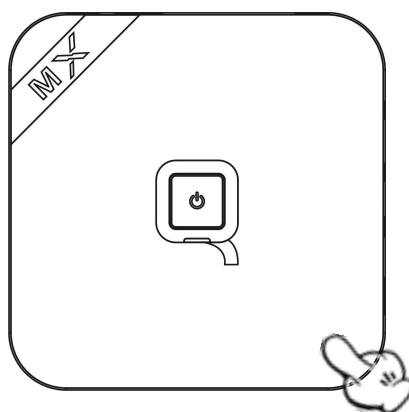


3. Under the power on mode, long press power button over 10 seconds to power off the device, Power LED turns off
4. Under power on mode, press remote control's power button, device is entering into sleep mode. Power LED turns into red

- Under sleep mode, device will be wake when you press remote control's power button, power LED turns from red to blue


2.1.2 Remote Control Introduction

- Standby/Wake up
- Mute
- Media
- APPS
- Music
- Web
- Volume -
- Volume +
- Previous
- Next
- Home
- Return
- Arrow keys
- OK
- Menu
- Mouse
- Numbers (0~9)
- Characters Switching Key
- Delete

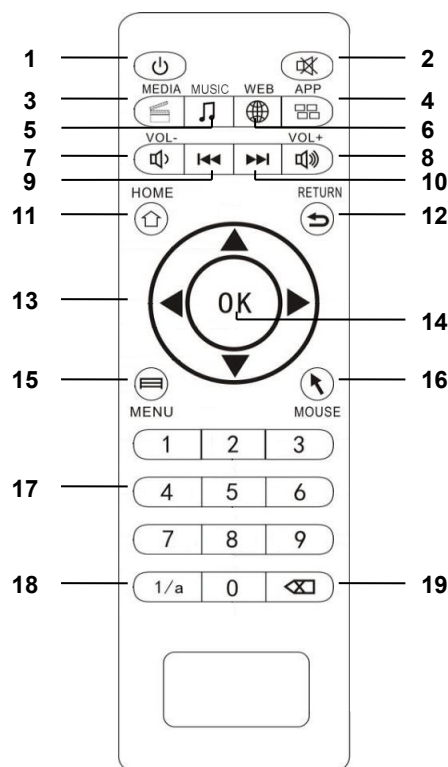


2.1.3 Open applications

Use remote control's arrow keys to choose the wanted program, click OK button to open the selected program

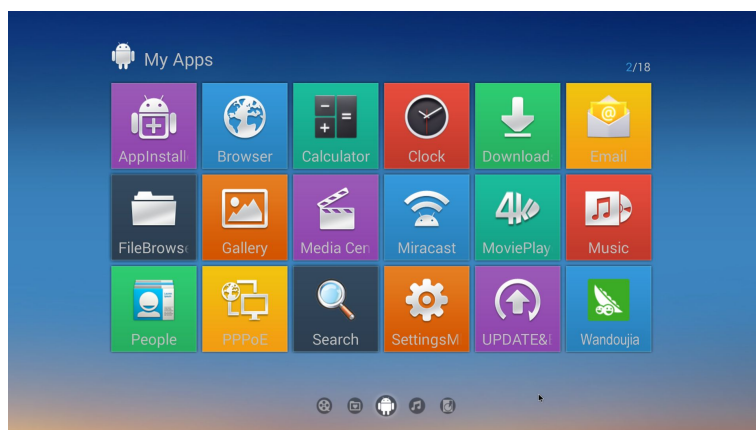

2.1.4 Switch in the applications

Click icon  to view recently used programs, click program icon to switch application arbitrarily

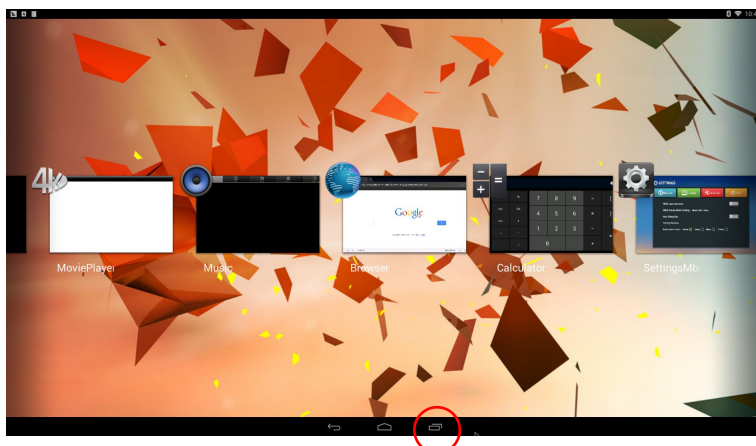

2.1.5 Close Applications

Click icon  * to view recently used programs, choose one of them by click and hold, drag it to blank area to close the application



* This function only operated in the condition of Mouse mode

2.1.6 Back To Home Screen

Click icon  to return to home screen


Click icon  on remote control to return to home screen

2.1.7 Read External Storage Data

Read U Disk


Insert U flash disk or removable hard disk into USB port in the status of power on, icon  appears in top left corner of the desktop, open "FileBrowser", the identified USB(A:) will

appear under “Local Disk”, U disk’s operation is available now

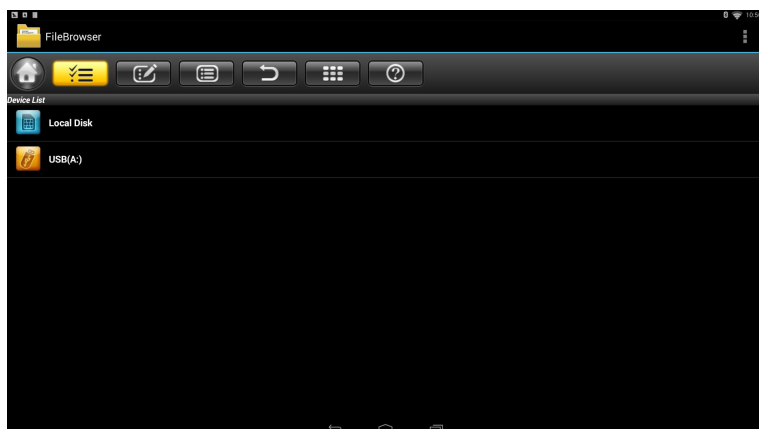


Read TF card

Insert TF card into the device in the status of power on, when icon  appears in top left corner of the desktop, open “FileBrowser”, the identified External Storage Card will appear under “Local Disk”, TF card’s operation is available now

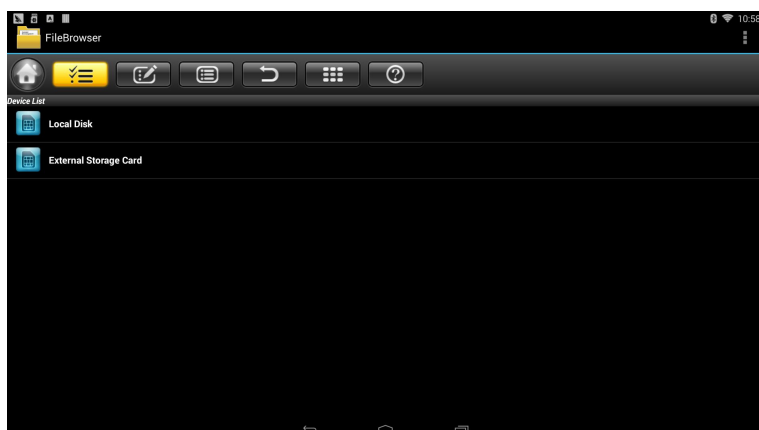


2.1.8 WIFI Function

Home Screen → SETTINGS → Network → Select “Wi-Fi” to open WIFI function

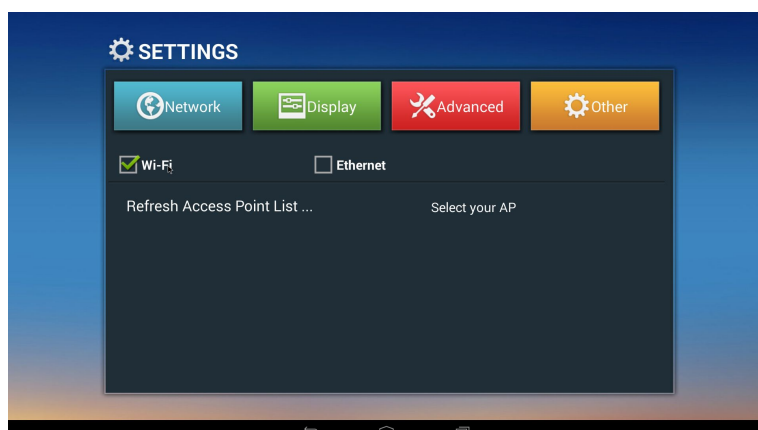


Choose hotspot → Input Password → Connect to the network

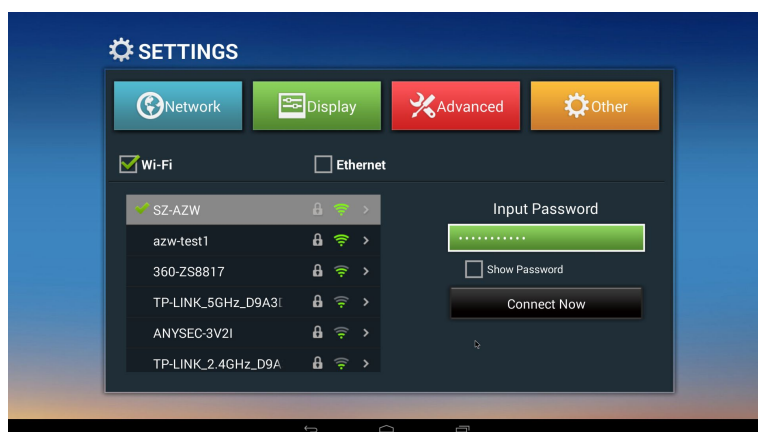


2.1.9 Ethernet Function

Home Screen → SETTINGS → Network → Select “Ethernet” to open Ethernet function

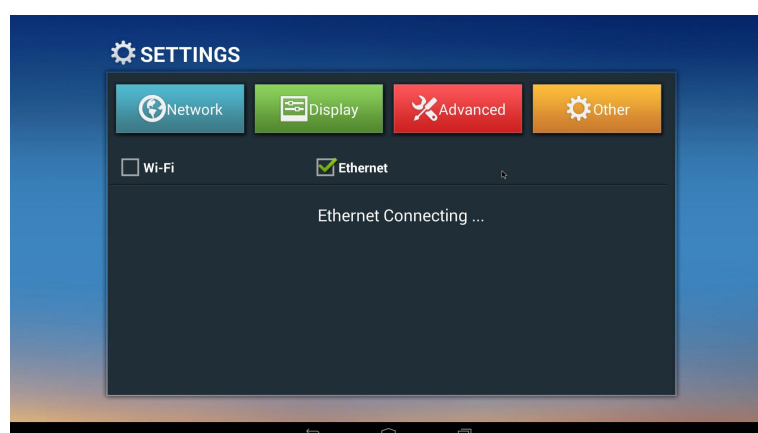


Insert network cable, network will be connected automatically

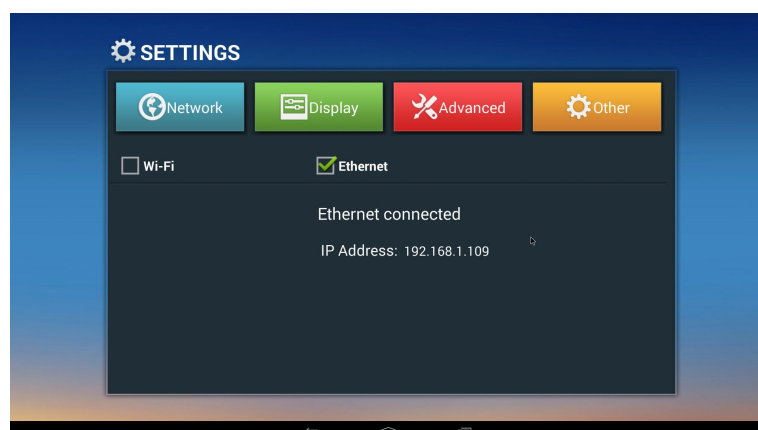


2.1.10 Bluetooth Function


Home Screen → SETTINGS → Other → More Setting → Bluetooth → ON

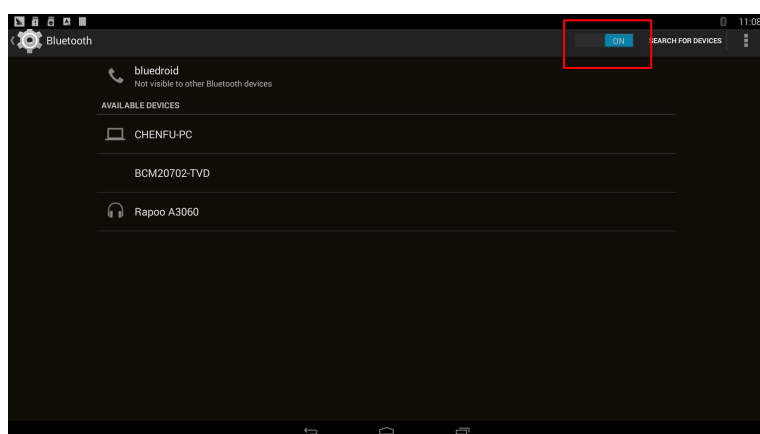

Click “Not visible to other Bluetooth devices”, the menu turns to “Visible to all nearby Bluetooth devices”, 2 minutes countdown begin

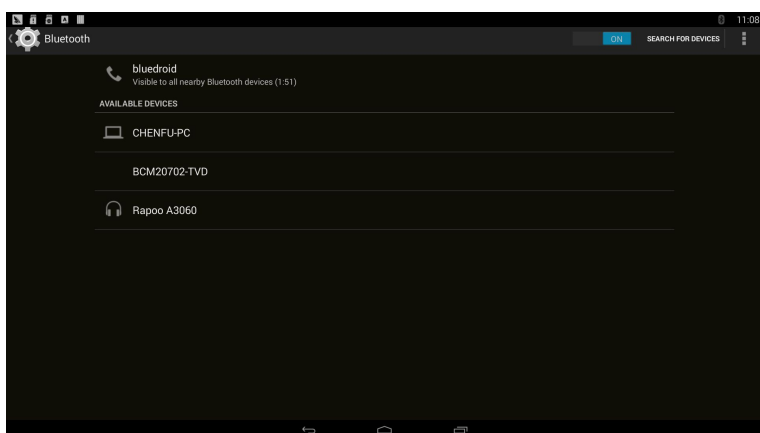

Select the target device within 2 minutes, connection will be done automatically, some devices need to enter pairing code, usually is 0000 or 1234

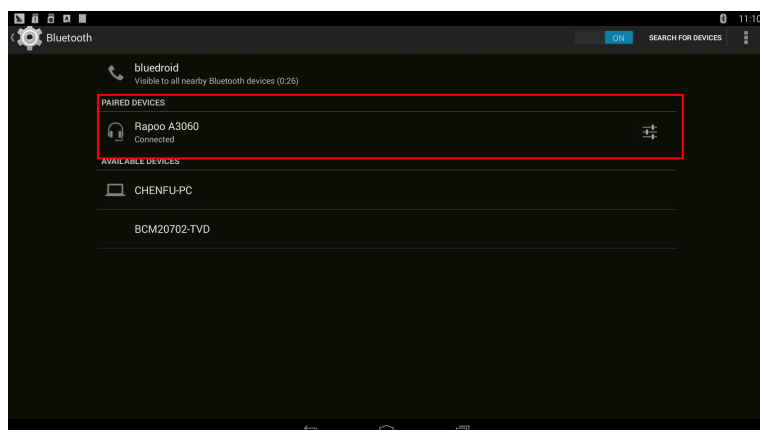


2.2 Advanced Operations

2.2.1 WLAN Hotspot


Operations on MXQ:

Home Screen → SETTINGS → Other → More Setting → More... → Portable hotspot → Select

“Portable Wi-Fi hotspot”

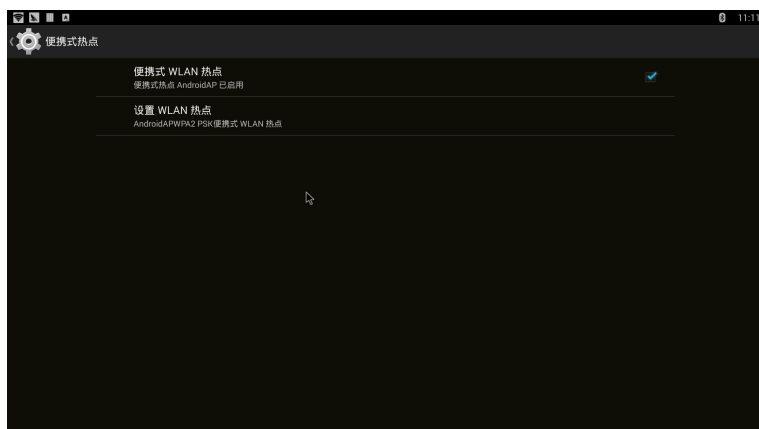

Select “Set up Wi-Fi hotspot” to set up “Network SSID”, “Security”, “Password” parameters

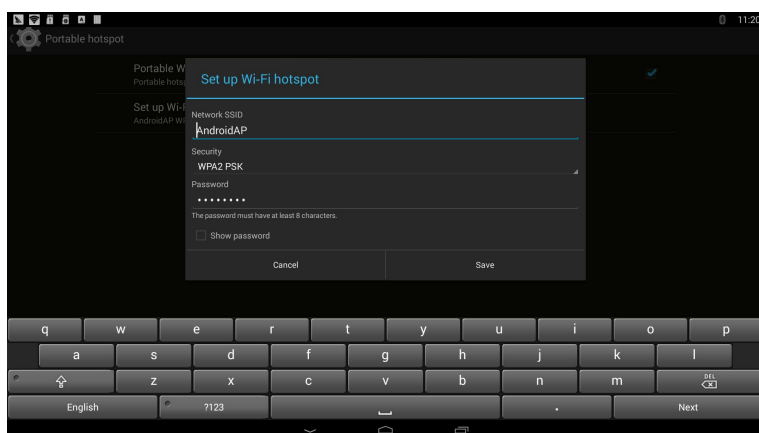


- * Ensure connected to the wired network, MXQ can be used as wireless AP to support more wireless devices access in the family

2.2.2 Miracast


Operations on MXQ

Home Screen → My recommend → Miracast → Open Miracast service

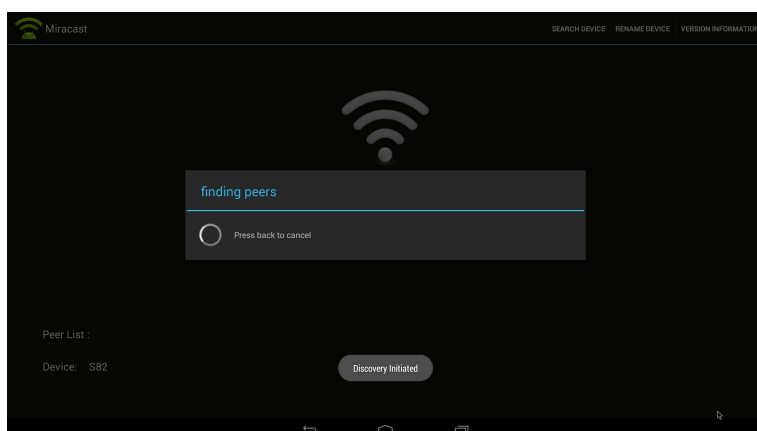


Operations on other devices (for example MIUI 2)

Home Screen → Settings → WLAN → Press menu → WLAN Display → Find the devices searched (MXQ), click invite

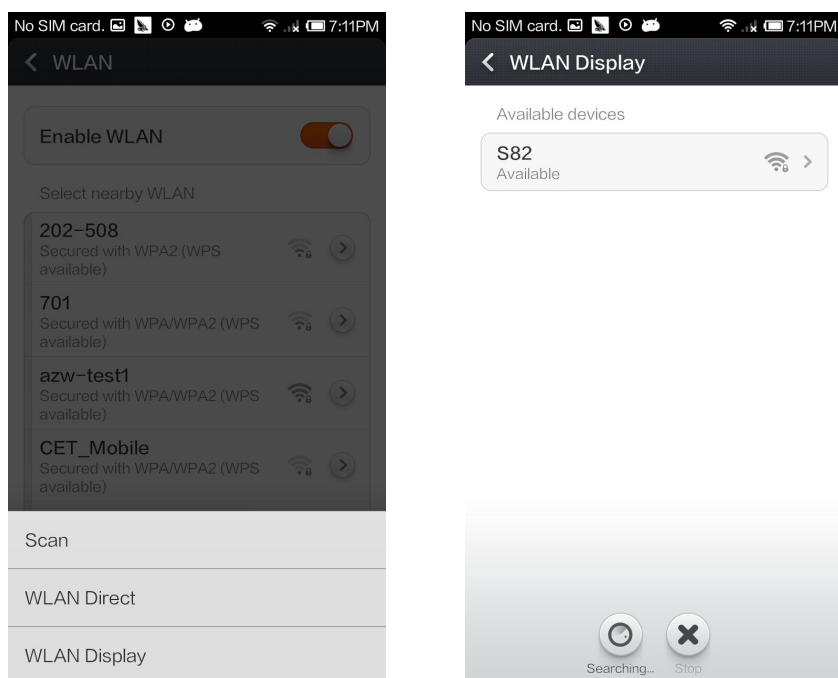

Corresponding device will be listed when MXQ begin to search, a pop-up invite window appears, click “accept”

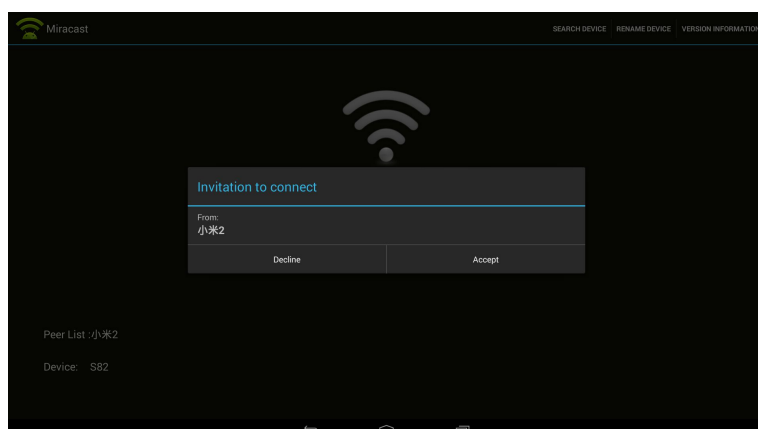


Complete connection, MXQ will display other device's images

2.2.3 DLNA


Ensure other devices like Iphone, Android smart phone, etc have opened iMediaShare *, Ensure them in the same local wireless LAN with MXQ

Operations on MXQ

Home Screen→My recommend→Media Center→DLNA DMR→Start DMR→ON

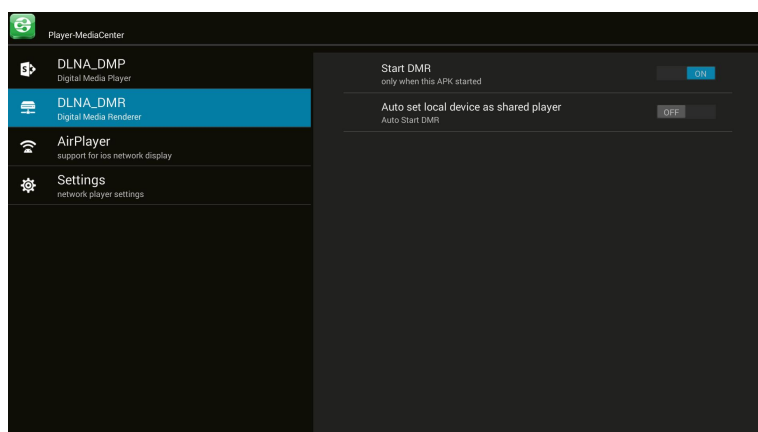

Select DLNA DMP to search device

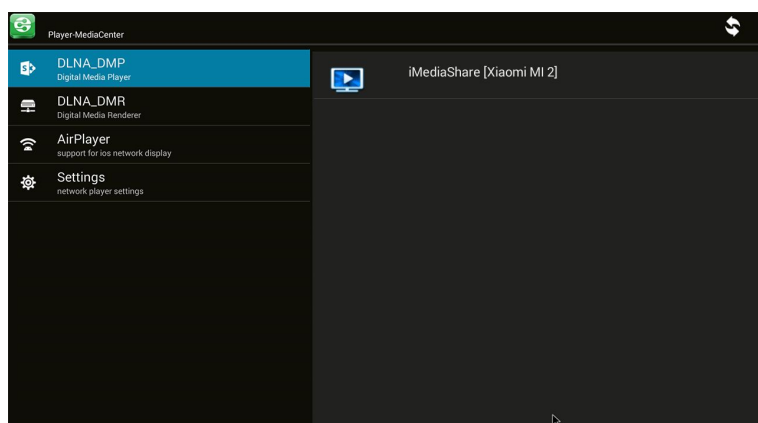

Complete connection, MXQ will display other device's images


* DLNA software including but not limited to iMediaShare

2.2.4 AirPlayer


Ensure Iphone devices (iPhone, iPad etc) in the same local wireless LAN with MXQ

Operations on MXQ:

Home Screen→ My recommend→Media Center→AirPlayer→Start AirPlayer→ON

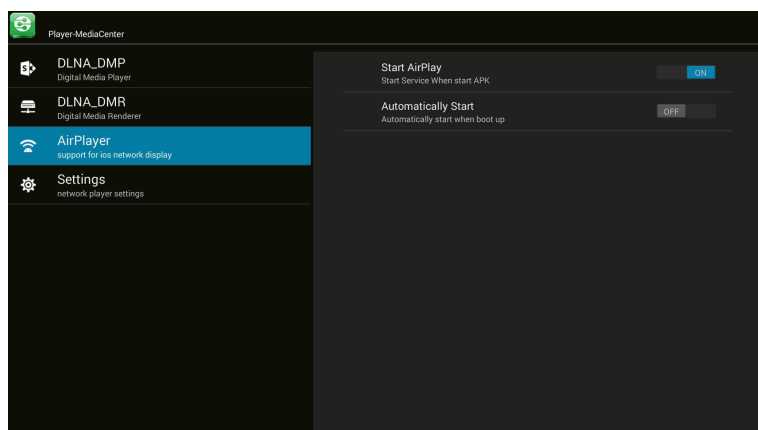


Operations on Iphone devices

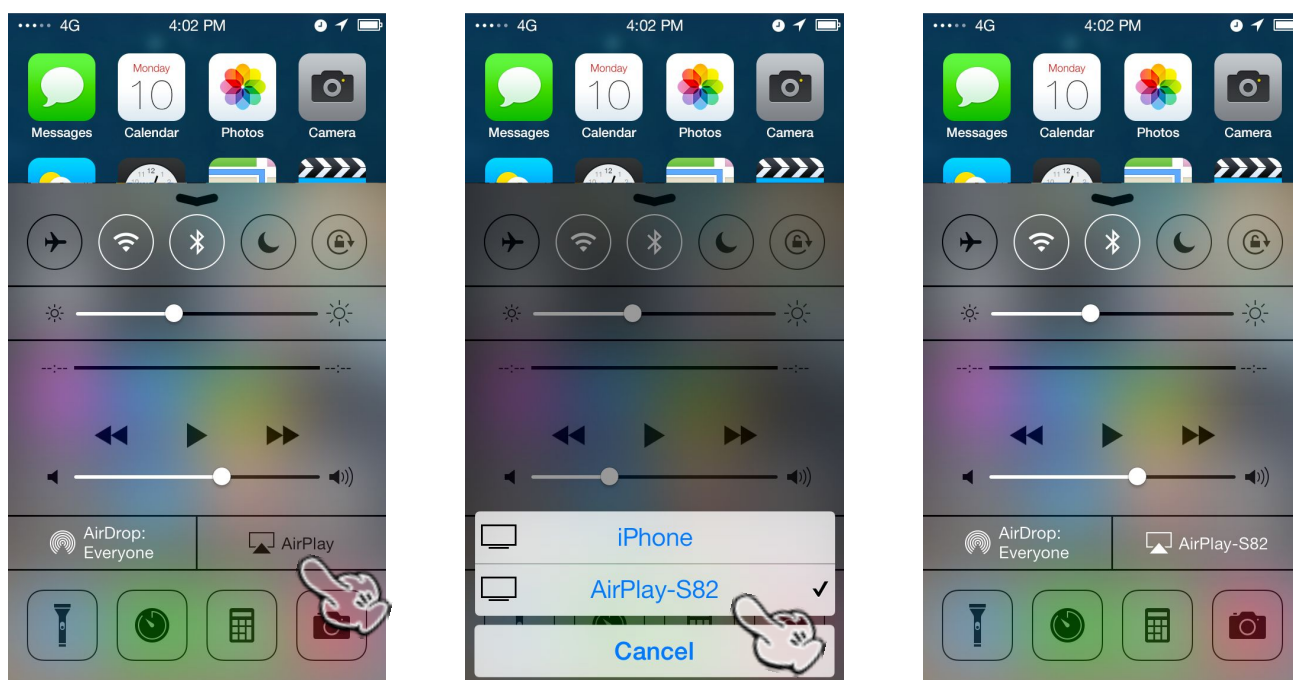


Through WIFI, multimedia content (Images, music and videos) in Iphone devices can be transferred to TV for playing

2.2.5 Remote Control

Home Screen → SETTINGS → Advanced → Remote Control → ON → Show the IP address

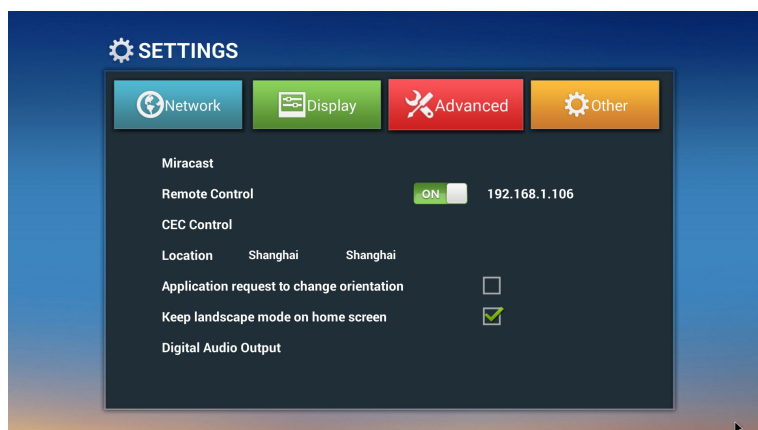

Ensure phone is in the same local wireless LAN with MXQ, install RemoteIME.apk and start the program, choose the IP address, then you can control the MXQ (support shifting between remote mode, movie mode, mouse mode and keyboard mode)

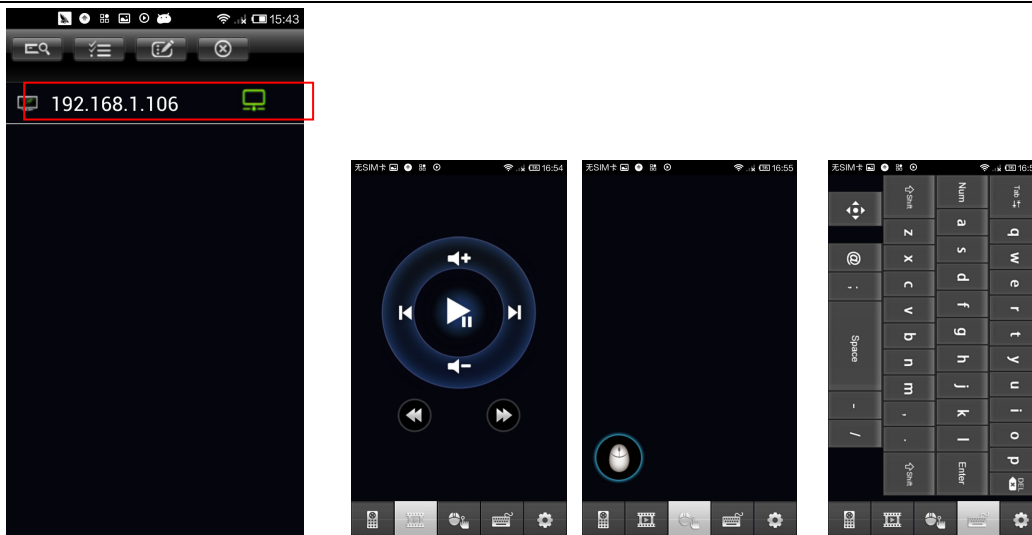

* RemoteIME.apk only can run well on android platform